

07/12/00



Customer No. 20350

TOWNSEND and TOWNSEND and CREW LLP
 Embarcadero Center, 8th Floor
 San Francisco, California 94111-3834
 (415) 776-0200

ASSISTANT COMMISSIONER FOR PATENTS
BOX PATENT APPLICATION
 Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is the

- [☒] patent application of
 [] continuation patent application of
 [] divisional patent application of
 [] continuation-in-part patent application of

Inventor(s)/Applicant Identifier: NED S. RASOR et al.

For: METHODS AND APPARATUS FOR RELIEVING HEADACHES, RHINITIS AND OTHER COMMON AILMENTS

- [☒] This application claims priority from each of the following Application Nos./filing dates:
60/143,164; FILED JULY 12, 1999, the disclosure(s) of which is (are) incorporated by reference.

Enclosed are:

- [☒] 41 page(s) of specification
 [☒] 07 page(s) of claims
 [☒] 01 page of Abstract
 [☒] 12 sheet(s) of [] formal [☒] informal drawing(s).
 [☒] A [] signed [☒] unsigned Declaration.
 []

**In view of the Unsigned Declaration as filed with this application and pursuant to 37 CFR §1.53(f),
 Applicant requests deferral of the filing fee until submission of the Missing Parts of Application.**

DO NOT CHARGE THE FILING FEE AT THIS TIME.

Telephone:
 (415) 576-0200

Facsimile:
 (415) 576-0300

Attorney Docket No. 20017-000110"Express Mail" Label No. EL525626275USDate of Deposit: July 12, 2000

I hereby certify that this is being deposited with the United States
 Postal Service "Express Mail Post Office to Addressee" service
 under 37 CFR 1.10 on the date indicated above, addressed to:

Assistant Commissioner for Patents
 Washington, D.C. 20231

By: Stuart McLeish

STUART McLEISH

James M. Heslin
 Reg. No.: 29,541
 Attorneys for Applicant

PA 3082751 v1

PATENT APPLICATION

**METHODS AND APPARATUS FOR RELIEVING
HEADACHES, RHINITIS AND OTHER COMMON AILMENTS**

Inventors:

NED S. RASOR, a citizen of United States,
residing at 15601 Montebello Road
Cupertino, California 95014; and

JULIA S. RASOR, a citizen of United States,
residing at 104 Smith Creek Drive
Los Gatos, California 95030.

Assignee:

CAPNIA, INCORPORATED
104 Smith Creek Drive
Los Gatos, California 95030
A Corporation of Delaware

Status:

Small Entity

METHODS AND APPARATUS FOR RELIEVING HEADACHES, RHINITIS AND OTHER COMMON AILMENTS

CROSS-REFERENCES TO RELATED APPLICATIONS

This application claims the benefit of provisional application nos.

- 5 60/143,164, filed on July 12, 1999; 60/148,736, filed on August 16, 1999; 60/164,125, filed on November 8, 1999, and 60/185,495 filed on February 28, 2000, under 37 CFR §1.78. The full disclosures of each of these applications are incorporated herein by reference.

BACKGROUND OF THE INVENTION

10 1. Field of the Invention

The present invention relates generally to medical apparatus and methods. In particular, the present invention relates to methods and devices for delivering carbon dioxide and other gases to patients for relieving symptoms associated with headache (e.g., migraine headaches, tension-type headaches, cluster headaches), jaw pain, facial pain
15 (e.g., trigeminal neuralgia), allergies (rhinitis and conjunctivitis), asthma, nervous disorders (e.g., epilepsy, Parkinson's), and other common ailments.

A walk through the headache and allergy section of any pharmacy quickly reveals that there is wide spread interest in remedies for relieving symptoms commonly associated with headaches, allergies, asthma, and other common ailments. The
20 commonly available therapies include oral medicines, nasal sprays, oral inhalers, nasal inhalers, eye drops, and nose drops, and probably other devices and approaches that have been developed over the years. Still more possible therapies are available from the pharmacy with a prescription from a patient's doctor (e.g., injectables, inhalables). Despite the very large number of therapies which are available, no one therapy meets all
25 patient needs, and many of the therapies suffer from very significant shortcomings. For example, present day therapies are slow-acting, have numerous adverse side effects (e.g., nausea, drowsiness, rebound headache from analgesic overuse, rebound congestion from decongestant overuse, dizziness, sedation, addiction, and numerous others), have low efficacy, and are contraindicated for a large portion of patients (e.g., those with
30 hypertension, coronary artery disease, cerebrovascular disease, peptic ulcers, pregnancy, concurrent medications that would interact, children, elderly, and others). Suffice it to

say that there is a continuing interest in providing improved methods and apparatus for treating such common symptoms and ailments.

The use of diluted carbon dioxide by inhalation for treating symptoms related to headaches, allergies, asthma, nervous disorders, and other common ailments was demonstrated in the 1940's and 1950's. The treatment protocols generally rely on breathing masks or other equipment for delivering relatively large volumes of dilute carbon dioxide for the patient to inhale through the mouth and/or the nose into the lungs until they become unconscious. The efficacy of this treatment depends upon the *systemic* effects of the inhaled gas and therefore require large volumes of gas. Typical carbon dioxide volumes inhaled were in the range from 0.5 to 25 liters of 30% to 70% carbon dioxide diluted in oxygen during a single treatment which was repeated several times a week for 25 to 50 treatments. While the use of inhaled carbon dioxide has proven to be quite effective for a number of indications, the wide spread use of carbon dioxide delivered in this manner never became popular. It is limited by the necessity of making the patient unconscious, the length of the treatment time and course, and the necessarily large, bulky non-portable gas cylinders and physician administration it requires. Most prior systems are so large and heavy they must be wheeled about using a dolly or a cart, and thus do not lend themselves to use outside of the hospital or home. While hand-held carbon dioxide dispensers have been proposed (for other purposes such as the treatment of hyperventilation), they are designed to deliver large volumes of dilute carbon dioxide for inhalation.

For these reasons, it would be desirable to provide improved apparatus and methods for treating the symptoms normally associated with headaches, allergies, asthma, and the like. Such apparatus and methods should provide small volumes of gas for convenient use away from the home, substantially immediate relief of symptoms, safety with few or no side effects, efficacy without requiring unconsciousness, efficacy in a large number of patients, therapy for those contraindicated for present day therapies, therapy without interaction with concurrent medications, low cost, a long life (in at least some embodiments), and permit the patient to administer the therapy and adapt the product usage for maximum comfort and effectiveness. At least some of these objectives will be met by the inventions described hereinafter.

2. Description of the Background Art

U.S. Patent No. 3,776,227, describes a hand-held dispenser that delivers dilute carbon dioxide intended for the treatment of hyperventilation by inhalation. In addition, this hand-held dispenser is not designed to deliver carbon dioxide at high concentrations which are unbreathable. Other inhalation devices, systems, and methods for delivering carbon dioxide and other gases and aerosols to patients are described in U.S. Patent Nos. 3,513,843; 3,870,072; 3,974,830; 4,137,914; 4,554,916; 5,262,180; 5,485,827; and 5,570,683.

Gas therapy for the treatment of headaches, allergies, asthma, and other conditions as well as associated physiology is described in the following references in the medical literature:

A. Carbon Dioxide Therapy

Diamond S Migraine headache – its diagnosis and treatment. *13th Annual Practicing Physician's Approach to the Difficult Headache Patient*, Rancho Mirage, CA, Feb 5-19, 2000

Fisher HK et al., *Am Rev Respir Dis* 114(5):861, Nov 1976

Fisher HK et al., *Am Rev Respir Dis* 101:855-896, 1970

Gillman MA et al, *Br J Psychiatry* 159:672-5, 1991

Grosshans VA et al., *Z Gesamte Inn Med* 42(23):667-70, 1987

Harrowes WMC, Selinger Z Fractional administration of carbon dioxide in the treatment of neuroses, in *Carbon Dioxide Therapy A Neurophysiological Treatment of Nervous Disorders*. Second Edition. LJ Meduna Ed, Charles C. Thomas publisher, Springfield, IL 1958

Jozefowicz RF *Neurologic Manifestations of Systemic Disease* 7(3):605-616, Aug 1989

LaVerne AA *Dis Nerv System* 14:5, 1953

Leake CD et al, *Calif West Med* 31:20, 1929

Loevenhart AS et al. *JAMA* 92(11), 1929

MacRae D Carbon dioxide in pediatrics, in *Carbon Dioxide Therapy A Neurophysiological Treatment of Nervous Disorders*. Second Edition. LJ Meduna ed, Charles C. Thomas publisher, Springfield, IL, 1958

Marcussen RM, Wolff HG, *Arch Neurol Psychiatry* 63:42-51, 1950

Meduna LJ *Dis Nerv System* 8(2), 1947

Meduna LJ *J Nerv & Ment Dis* 108:373, 1948

Meduna LJ Ed, *Carbon Dioxide Therapy A Neurophysiological Treatment of Nervous Disorders*. Second Edition. Charles C. Thomas publisher, Springfield, IL 1958

5 Moriarty JD Prognosis with carbon dioxide therapy, including the epinephrine-mecholyl test (Funkenstein test), in *Carbon Dioxide Therapy A Neurophysiological Treatment of Nervous Disorders*. Second Edition. LJ Meduna Ed, Charles C. Thomas publisher, Springfield, IL, 1958

Moriarty JD *J Clin & Exper Psychopath* 13(3), 1952

10 National Headache Foundation. A patients guide to migraine prevention & treatment, Chicago, IL, Aug 1966.

Rodarte JR et al., *Resp Physiol* 17:135-145, 1973

Singh V et al., *Lancet* 335:1381-3, 1990

15 Wilkinson WE Some clinical observations pertaining to the effects of carbon dioxide on the biology of mental disease, in *Carbon Dioxide Therapy A Neurophysiological Treatment of Nervous Disorders*. Second Edition. LJ Meduna Ed, Charles C. Thomas publisher, Springfield, IL, 1958

Wilmoth DF et al., *AACN Clin Issues* 7(4):473-81, Nov 1996

B. Nitric Oxide Therapy

Pagano D et al., *Eur J Cardiothorac Surg* 10(12):1120-6, 1996

20 Ream RS et al., *Crit Care Med* 27(5):989-96, May 1999

Schenk P et al., *Ann Emerg Med* 33(6):710-4, Jun 1999

C. Helium Therapy

Hollman G et al *Crit Care Med* 26(10):1731-6, Oct 1998

Jolliet P et al *Crit Care Med* 27(11):2422-9, Nov 1999

25 Schaeffer EM et al *Crit Care Med* 27(12):2666-70, Dec 1999

D. Physiology

Aizawa et al., *Eur Respir J* 13(4):775-80, Apr 1999

Cha EJ et al., *J Appl Physiol* 62(4):1544-50, Apr 1987

Fiermonte G et al. *Acta Neurol Scand* 92(2):166-9, Aug 1995

30 Glovsky MM *Cur Opin in Pulm Med* 4:54-58, 1998

Leake CD *Sci Monthly* 20:320, 1925

Loh E et al., *Ann Thorac Surg* 67(5):1380-5, May 1999

- Lorente de No´ R *Studies of the Rockefeller Institute* 131:148-194, 1947
- Nielsen TM et al., *Acta Physiol Scand* 98(2):192-9, Oct 1976
- Saqueton CB et al., *Am J Physiol* 276(6 Pt 1):L925-L932, Jun 1999
- Schuttauf F et al *Ophthalmologe* 95(4):225-8, Apr 1998
- 5 Sterling GM et al., *J of Appl Physiol* 32(1):39-43, Jan 1972
- Tang A et al., *Clinical Research* 20:243, 1972

SUMMARY OF THE INVENTION

According to the present invention, methods, apparatus, and kits are provided for relieving symptoms associated with a variety of common ailments, particularly headaches, rhinitis, asthma, and epilepsy. Specific symptoms include head pain, jaw pain, facial pain, sinus congestion, sneezing, itchy throat, itchy eyes, rhinorrhea, difficulty breathing, seizures, and the like. This list of ailments and symptoms is not meant to be exhaustive, and the present invention may find use with other disorders where infusion with the treatment gases described hereinafter are found to provide for symptomatic relief. The inventions allow delivery of a small volume of therapeutic gas at high concentration directly into the nasal passages locally without inhalation providing faster relief without the adverse side effects of systemic drugs that are ingested, injected, or inhaled.

The present invention relies on infusing or bathing the mucous membranes of a body region of a patient, e.g., nasal and/or oral and/or ocular, with a treatment gas that induces a therapeutic effect relieving symptoms. An exemplary treatment gas is carbon dioxide but other gases such as nitric oxide, oxygen, isocapnic mixtures of gaseous acids, helium, and the like, will also find use. The therapeutic gases (referred to herein as “therapeutic gases”) may be used in a substantially pure form without other gases, active agents, or other substances that dilute the therapeutic gas or that have other biological activities. In other instances, however, the therapeutic gases may be combined with other gases, such as inert carrier gases, active gases, solids to form aerosols, liquid droplets to form aerosols, sprays, powders, or the like to potentiate (enhance) their effects. Conversely, these agents combined with the therapeutic gas can potentiate the effects of the therapeutic gas. In such instances, the therapeutic gases and mixtures may have biological activities in addition to the relief of symptoms accompanying common ailments, as described above. In all instances, however, the carbon dioxide or other principle therapeutic gas will be delivered in a quantity and over a time course that results

in the reduction or elimination of the symptom that is being treated. A preferred aspect of the present invention is providing the patient with the ability to select a rate of infusive gas flow and total gas dose that are effective and tolerable for the particular patient, which flow rate and dose are generally much smaller than those employed in previous art.

5 The present invention provides for the desired symptomatic relief by infusing the treatment gas into a nasal and/or oral cavity without the patient necessarily inhaling the therapeutic gas. In particular, it has been found that by having the patient not inhale the therapeutic gas, i.e., substantially prevent passage of the therapeutic gas into the trachea or lungs by holding his or her breath or by breathing either nasally or orally
10 via the route not being infused with the therapeutic gas, the volume of the body region being treated is significantly reduced. A relatively low volume of the carbon dioxide or other treatment gas can thereby be used to achieve the desired therapeutic effect. In addition, substantial exclusion from the lungs permits the use of the treatment gas at high (chronically unbreathable) concentrations, often being substantially pure approaching
15 100%, which is necessary to achieve maximum effective treatment via the nasal and oral mucosa. Furthermore, nasal or oral infusion of a chronically unbreathable mixture of an inert carrier gas with nitric oxide permits direct delivery of nitric oxide to the treated mucosa without the oxidation of nitric oxide that would occur if the carrier gas were a chronically breathable mixture of nitric oxide with air or oxygen.

20 In the case of mild headaches, rhinitis, or similar conditions, a total carbon dioxide volume as low as one cubic centimeter (cc) delivered over a time as short as one second may achieve adequate symptomatic relief. Of course, for more severe symptoms, such as those associated with migraine headache, the total treatment volumes of carbon dioxide and treatment times may be much greater.

25 Nasal and/or oral administration of concentrated carbon dioxide without inhalation may provide adequate symptom relief for asthma due to the physiologic phenomenon known as the nasobronchial reflex. In all cases, however, it is believed that the ability to successfully relieve the patient's symptoms depends primarily on the total volume of treatment gas delivered to the patient over a sufficiently long duration. That is,
30 the rate at which the treatment gas is delivered has little effect, and generally the patient can use as rapid a delivery rate as the patient finds comfortable or tolerable in order to achieve a target total dosage and reduce the amount of time needed for treatment. Guidelines for dosages and treatment times for infusion into a nasal and/or oral cavity for

common symptoms associated with particular ailments are set forth in the Dosage Guideline below.

TABLE I DOSAGE GUIDELINE			
Condition	Flow Rate (cc/sec)	Treatment Time Typical (Range) (sec)	Total Dosage Typical (Range) (cc)
<i>Allergic Rhinitis:</i>			
Mild	1-10	3 (1-5)	10 (2-20)
Moderate	1-10	15 (2-30)	30 (2-60)
Severe	1-10	50 (3-79)	160 (12-350)
<i>Tension-Type Headache:</i>			
Mild	1-10	5 (1-16)	30 (1-80)
Moderate	1-10	10 (2-16)	50 (2-80)
Severe	1-10	60 (24-135)	300 (168-675)
<i>Migraine Headache:</i>			
Mild	1-10	30 (15-50)	80 (40-150)
Moderate	1-10	60 (23-115)	160 (65-345)
Severe	1-10	85 (30-180)	250 (90-540)

5 The present invention also provides for the desired symptomatic relief of allergic eye irritation (e.g., conjunctivitis) by infusing the treatment gas over the eye, either behind a cupped hand over the eye or by other cup means that confine the therapeutic gas at high concentration over the eye for the treatment period. The treatment time and dose for treatment of the eye are similar to those for nasal and oral treatment.

10 A first aspect of the present invention provides methods for delivering a therapeutic gas, e.g., carbon dioxide, nitric oxide, oxygen, isocapnic mixtures of gaseous acids, helium, and the like to a human patient. The method comprises generating a flow of the carbon dioxide or other therapeutic gas, and infusing a mucous membrane or an eye with the flow of the gas. As described above, in order to limit and concentrate the
15 infusion of the therapeutic gas for nasal and/or oral treatment, the patient usually refrains from inhaling the therapeutic gas while the nasal or oral mucous membrane is being infused or the patient breathes either nasally or orally via the route not being infused with the therapeutic gas. In this way, the volume of the nasal and/or oral cavity that is filled by

the flowing therapeutic gas is minimized and the concentration of the gas maximized since the therapeutic gas does not need to fill the large capacity of the lungs to provide a therapeutic effect.

While it will be preferred not to inhale the therapeutic gas, the gases are not toxic and some passage of the gasses into the trachea and/or lungs will not significantly detract from the therapy. Moreover, with practice, many patients will be able to continue breathing ambient air through a nasal or oral route while simultaneously infusing the oral or nasal mucous membranes with the therapeutic gas. That is, in some cases, the patient may continue breathing through the mouth while infusing the nasal passages with the therapeutic gas or continue breathing through the nose while infusing the oral cavity with the therapeutic gas. Thus, in the first aspect of the present invention, the patient is required only to limit or inhibit passage of the therapeutic gas into the trachea and/or lungs in order to localize or concentrate the therapeutic gas in the nasal or oral passages being treated.

In particular embodiments, the therapeutic gas may comprise essentially pure carbon dioxide. By "essentially pure," it is meant that the carbon dioxide, or other therapeutic gas, is free from the significant presence of other gases, i.e., the total volume of gas will comprise at least 50% carbon dioxide, preferably at least 70% carbon dioxide, and more preferably 95% or greater. In addition to being free from other gases, the carbon dioxide will be free from other physiologically or biologically active components, such as drugs, surfactants, and other substances that, although present at relatively low concentrations, would have physiologic or biologic effect.

In other embodiments, however, the carbon dioxide, or other therapeutic gas, may be present in a carrier which would have a significant presence, i.e., the total volume of carbon dioxide will comprise at least 6% carbon dioxide, preferably at least 30% carbon dioxide, and more preferably 49%. The carrier may be inert or biologically active. Exemplary inert carrier gases include nitrogen, air, oxygen, halogenated hydrocarbons, and the like. In preferred embodiments, the therapeutic gases are generated at a flow rate in the range from 1 cc/sec to 20 cc/sec, preferably from 2 cc/sec to 10 cc/sec. For pediatric application, flow rates less than 1 cc/sec (e.g., 0.5 cc/sec) may be preferred. Infusion preferably comprises directing the flow of therapeutic gas into one nostril and allowing the flow to infuse through the nasal passages and pass outwardly through the other nostril. Such infusion will occur under the pressure of the therapeutic gas that is being released into the one nostril, i.e., the patient is not inhaling or otherwise

causing the therapeutic gas to infuse through the nasal passages. In such nasal passage infusion protocols, the patient's mouth is closed in order to block exit of the gas through the mouth. In an alternative infusion protocol, the therapeutic gas is directed into the patient's mouth and allowed to exit through either or both nostrils. In still another
5 infusion protocol, the therapeutic gas is directed into a nostril or both nostrils and exits through the open mouth. In the latter two protocols, both the oral mucous membranes and nasal mucous membranes are infused with the therapeutic gas. The patient should avoid breathing substantially through the oral or nasal passages being perfused with the therapeutic gas. It should be recognized that the patient can breathe through the mouth
10 while perfusing the nasal passages, and can breathe through the nose while perfusing the oral cavity. Furthermore, the patient can take single breaths during a long infusion step without substantially changing the total infusion time in that step.

The treatment steps may occur as a single infusion or multiple infusions. The length of any particular infusion step will depend, among other things, upon the
15 degree of relief the patient is experiencing, i.e., the patient may continue and/or repeat infusions until relief is achieved. Single infusion steps usually will be performed for a time in the range from 1 second to 20 seconds for rhinitis relief and 1 second to 60 seconds for headache relief, and more usually from 2 seconds to 15 seconds for rhinitis and 10 seconds to 30 seconds for headache. The infusing steps often will be repeated
20 one, two, three, four, or more times in order to achieve the desired total treatment time set forth in the table above. Usually, methods will be performed with hand-held or other delivery devices which have an adjustable flow rate capability. That is, the devices may be adjusted to deliver relatively constant therapeutic gas flows at a particular value within the range from 1 cc/sec to 20 cc/sec. The methods may thus further comprise adjusting
25 the gas flow to a level which the patient perceives is comfortable. After the gas flow is adjusted, a total duration of treatment may be determined based on the gas flow and the desired total amount of gas to be delivered. While such treatment flows and treatment times may initially be selected based on data, such as provided in Table I above, it will be appreciated that the patient will eventually learn what treatment flow rates, treatment
30 times, and number of treatments lead to successful symptom relief for them personally. Indeed, in medical practice today, gas therapy is a "titrate to effect" therapy without a specified dosage.

A second aspect of the present invention comprises methods for generating a therapeutic dosage of carbon dioxide or other treatment gas. The methods comprise

releasing from a hand-held dispenser a flow of therapeutic gas comprising from 1 cc/sec to 20 cc/sec of carbon dioxide. Preferably, the gas flow will consist essentially of carbon dioxide, i.e., be pure carbon dioxide as described above. Alternatively, however, the gas flow may comprise carbon dioxide present in a carrier gas, also as described above and/or

5 with solid or liquid drugs or other substances. The hand-held dispenser will have an outlet suitable for delivering the gas to the patient. In a preferred embodiment, the outlet will be suitable for sealing in or against a human nostril. In an alternative embodiment, the outlet will be suitable for sealing in or against a human mouth. In another alternative embodiment, the outlet will be suitable for sealing around a human eye or both eyes. One

10 or more treatment steps may be performed, with each step having a duration in the range from 1 second to 100 seconds, preferably from 2 seconds to 30 seconds, and often from 1 second to 20 seconds, depending on the condition being treated and on its severity. The total number of treatment steps will be selected depending on symptom severity. Typically mild symptoms require 1 or 2 treatment steps, moderate symptoms require 2 to

15 3 treatment steps, and severe symptoms require 3 to 8 treatment steps. The total number of treatment steps will be selected depending on the flow rate in order to provide a total target dosage of the carbon dioxide. Typically, the flow rates will be adjustable to a set point within the range from 1 cc/sec to 20 cc/sec. While such treatment flows and treatment times and number of treatment steps may initially be selected based on data,

20 such as provided in Table I above, it will be appreciated that the patient will eventually learn the treatment regimen that leads to successful symptom relief for them personally.

In yet another aspect, the present invention comprises dispensers for delivering therapeutic gases to a patient. The dispensers comprise a container holding a volume of the therapeutic gas, typically carbon dioxide or any of the other therapeutic

25 gases described above. The dispenser further comprises a flow regulator that releases a flow of the therapeutic gas from the container to an outlet that is adapted to seal against a human nostril, mouth, or eye. Thus, the dispensers will be useful for delivering the therapeutic gas to the nostril, mouth, or eye for infusion of a mucous membrane according to the methods generally described above. As in the methods described above, the

30 therapeutic gas is preferably carbon dioxide, either substantially pure carbon dioxide or carbon dioxide present in a carrier gas or liquid and/or combined with other active or non-active substances. The flow regulator preferably will be adjustable so that the patient can select a flow rate in the range from 1 cc/sec to 20 cc/sec, or within the other ranges set forth above. In an exemplary embodiment of the dispenser, the container comprises a

cylinder, the adjustable flow regulator comprises a turnable cap at one end of the cylinder, and the outlet comprises a nozzle in the cap. The regulator may be turned to open the dispenser and initiate a flow of the carbon dioxide or other therapeutic gas. By then appropriately turning the cap, the flow rate can be adjusted to the user's preferred rate, and the outlet then inserted into or around the appropriate patient's orifice, in order to initiate infusion according to the methods described above.

In a further aspect, dispensers of the present invention for delivering carbon dioxide to a patient comprise a container holding a volume of carbon dioxide under pressure. A flow regulator is provided on the container and releases a flow of carbon dioxide from the container at a rate in the range from 1 cc/sec to 20 cc/sec. Preferably, the dispenser further comprises an outlet, where the outlet may be adapted to seal against a human orifice. Usually, the carbon dioxide will be substantially pure, although in other cases may be present in a carrier gas or liquid or in combination with other active or non-active substances. In certain particular embodiments, the carbon dioxide is present in the container as a liquid, wherein relatively large volumes of carbon dioxide can be stored. In other instances, the carbon dioxide will be present in the container as a pressurized gas. While the latter dispensers will hold less carbon dioxide, they do not need to be as sturdy as the containers that hold liquid carbon dioxide at much higher pressures. Preferably, the flow regulators will be adjustable to set points within the flow rate range.

In yet another aspect, kits according to the present invention comprise a container holding a therapeutic gas and instructions for use setting forth any of the methods described above for delivering the gas to a patient. The container may comprise any of the preferred dispensers described above, and the instructions for use and container will usually be packaged together in a conventional medical device package, such as a tube, tray, pouch, box, or the like.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a hand-held gas dispenser constructed in accordance with the principles of the present invention.

Fig. 2 is an axial cross-sectional view of an initial embodiment of the dispenser of Fig. 1.

Figs. 3A-3C are detailed cross-sectional views of the dispenser head and flow regulator of the dispenser of Figs. 1 and 2.

Figs. 4A and 4B are detailed illustrations of the flow regulator needle of the dispenser head, showing exemplary dimensions for the initial and preferred needle configurations respectively.

5 Fig. 4C illustrates the analytical relationship between the critical needle taper angle α and the size of the annular orifice d for a needle displacement x .

Fig. 5 is a detailed view of the penetrable cap positioned in the pressurized gas container of the dispenser of Figs. 1 and 2, shown after penetration by the needle of Fig. 4A.

10 Fig. 6 illustrates a preferred embodiment for calibrating the flow regulator of Figs. 3A-3C.

Fig. 7 is a cross-sectional view taken along line 7-7 of Fig. 6.

Fig. 8 is a cross-sectional view taken along line 8-8 of Fig. 7.

Fig. 9 is a schematic illustration of a hand-held gas dispenser connected to a large gas supply source.

15 Fig. 9A illustrates an alternative construction for a dispenser head having separate puncture and flow-regulating means.

Fig. 9B illustrates a preferred two-piece dispenser head embodiment.

Fig. 10 illustrates an alternative hand-held dispenser employing a relatively low pressure gas source.

20 Figs. 11 and 12 illustrate another alternate embodiment of the dispenser of the present invention, illustrating a chemical-gas generation system for producing gas according to the methods of the present invention.

Fig. 13 illustrates a patient employing the dispenser of Fig. 1 for treatment of symptoms associated with common ailments.

25 Fig. 14 illustrates a kit constructed in accordance with the principles of the present invention.

Fig. 15 is a graph comparing flow rate control sensitivity achieved with different needle designs.

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

30 1. Treatment of Allergic Rhinitis and Headache

It has been found by the inventors, that bathing the mucous membrane of the nose, nasal passages, and mouth, with gaseous carbon dioxide for times as short as one second can suppress the onset of acute irritation of the mucosa caused by triggers

such as airborne and contact-transmitted allergens and/or antigens. Furthermore, chronic inflammation of the mucosa and associated distress, caused by extended exposure to allergens and/or antigens, may be relieved within a few minutes by repeating such carbon dioxide applications. A possible mechanism of action of the above described local carbon dioxide treatment is the following. Creating a high concentration of carbon dioxide (hypercapnia) by infusing it into the nasal passages causes a very fast lowering of the pH (making more acidic) of the mucous membranes depressing the neuronal activity (inhibiting inflammatory mediator release such as histamine) of the nerves that supply the nasal mucous membranes and connect directly to the brainstem. Asthma is known to be a comorbid disease to allergic rhinitis. Carbon dioxide is known to relax both central and peripheral airways in asthmatic adults. In addition, it is known that oxygenation is improved in patients with status asthmaticus, chronic obstructive pulmonary disease, and bronchiolitis by inhalation of helium. Also, inhaled nitric oxide improves the oxygenation and ventilation of most children with acute, hypoxic respiratory failure. For this reason, these respiratory ailments can be reduced or relieved by administering the above-described treatment using carbon dioxide or helium or nitric oxide. Furthermore, headaches (e.g., migraine headaches, tension-type headaches, cluster headaches, jaw pain, facial pain) are thought to be due to triggers creating a hyperexcitability state of nerves releasing inflammatory mediators such as histamine and serotonin. For this reason, headaches can be reduced or relieved by administering the above-described carbon dioxide treatment. Epilepsy, also a nervous hyperexcitability state, is known to be a comorbid disease to headaches and antiepileptic medications are used for migraine prevention. For this reason, epilepsy can be reduced or relieved by administering the above-described carbon dioxide treatment. A convenient hand-held easily controlled dispenser of carbon dioxide has been found to be an adequate and optimum means for practicing this carbon dioxide application process. Furthermore, other gases such as nitric oxide, oxygen, helium, and others may be administered similarly as therapeutic gases via the convenient hand-held easily controlled dispenser.

Essential elements of successful suppression of irritating symptoms, pain, and inflammation through use of carbon dioxide are the convenient dispensing of the carbon dioxide or other therapeutic gas at a time, at a controlled flow rate, and for a duration selected by the user. Because of the ability of carbon dioxide to quickly or immediately suppress an acute attack, the means for carbon dioxide application should be available immediately, upon demand by the user, at the time when irritating symptoms

appear upon exposure to a trigger. If circumstances do not permit such immediate application, the means for application must be available continuously to relieve the consequent inflammation and distress as soon as possible after the exposure when circumstances permit its use.

5 Furthermore, it is desirable that the user be able to conveniently but precisely and controllably select a rate and duration of carbon dioxide flow that lies between the lower limit of effectiveness and the upper limit of tolerance. It has been found that these limits are subjective, depending upon the personal sensitivities of the individual user, the degree and extent of the user's irritant reaction, and the site of carbon
10 dioxide injection. Flows as low as 1 cc/sec for 1-2 seconds into the nose are effective for suppression of onset of acute allergic symptoms, whereas flows of 4-5 cc/sec for 5-10 seconds are typically selected for optimum relief from a mild chronic allergy attack. For severely inflamed mucosa and/or for injection into the mouth, flows as high as 10 cc/sec or higher for as long as 15 seconds or longer often are selected for optimum relief. For
15 the treatment of tension and migraine headaches, the flow durations can be substantially longer, as generally set forth in the Dosage Guideline (Table I) above.

At low flow rates, the presence of the carbon dioxide produces a "tingling" sensation similar to that produced during drinking of carbonated beverages that inadvertently enter the nasal passages e.g., "bubbles up the nose". This is the effective
20 rate and the tingling is a welcome sensation because it usually coincides with immediate relief of symptoms. Above a certain subjectively determined flow rate the sensation becomes unpleasant, which may be described as a "stinging" or "burning" sensation. At a still higher flow rate (maximum tolerable rate), the stinging sensation becomes intolerable and subjects remove the device from their nostril. It has been found that, for a few
25 individuals, this tolerance level can be as low as 1-2 cc/sec for a second or less of injection into the nose. More typically, an injection rate of up to 10 cc/sec can be tolerated for 5 seconds or more into the nose by most users and into the mouth by almost all users. It must be noted, however, that the tolerance level depends strongly on the sequential phase of the application and on the degree of inflammation and/or pain at that
30 phase. The tolerance level generally is lower (e.g., < 3 cc/sec typically) at the onset of the first carbon dioxide injection, especially when there has been chronic inflammation and/or pain. After a few seconds the tolerance level rises substantially to the levels already discussed. In fact, the "stinging" sensation is described as a welcome immediate relief to the "tickling" sensation that causes sneezing and other distress during an allergy

attack, i.e., analogous to relieving an itch by scratching a skin irritation. Similarly, the “stinging” sensation is described as a welcome immediate relief to the “pressure” sensation that causes pain and other distress during a headache attack.

- Accordingly, the range of effective and tolerable flow rates of carbon dioxide is between 1 cc/sec and 20 cc/sec, preferably between 1 cc/sec and 10 cc/sec, and most preferably between 2 cc/sec and 10 cc/sec. The carbon dioxide flow is preferably regulated easily, controllably, and with rapid response within this range of flow rates by the user.

- Most often the major site of general distress is the head, for which the preferred mode of carbon dioxide injection is directly into a nostril. While not inhaling the carbon dioxide, carbon dioxide is injected into a nostril and continued until full relief is obtained. This usually occurs when the carbon dioxide flow is detected exiting the opposite nostril and/or the mouth. With an allergy attack, often the nasal passages are blocked by swelling of the mucosa, in which case sufficient pressure automatically builds to open and perfuse the passage through each nostril separately. When both passages are clear, each can be perfused separately by holding one nostril closed while opening the mouth, or both can be perfused by closing the mouth and allowing the flow into one nostril to exit through the other. Frequently inflammation, swelling, and itching of the upper mouth accompany the irritant reaction to the allergen and/or antigen. In this case, it is most effective to inject the carbon dioxide through pursed lips directly into the mouth with exit through the nose while the breath is held. Specific techniques may be learned by experience and optimum procedures will depend on personal preference. The ability of the patient to optimize the treatment protocol is enabled by the fully adjustable flow rate and selectable injection site afforded by the devices of the present invention.

25 2. Initial Dispenser Embodiment

- Figs 1-5 illustrate an initial dispenser embodiment 10 that was designed, built, and tested, with test results shown below. A subsequent presently preferred dispenser embodiment, having similar basic function but with improvements as described in Section 4 below, also was designed, built, and tested, with test results shown below. In the initial dispenser embodiment, a carbon dioxide cartridge housing 12 has screw threads 14 on the neck 15 of the cartridge. Such threaded carbon dioxide cartridges presently are marketed for use in other applications (available from Leland Limited, Inc., South Plainfield, NJ), although the contents of such present carbon dioxide cartridges have not

been qualified for administration to humans. The threaded carbon dioxide cartridge 12 is screwed into a threaded dispenser head 16, containing a perforating and flow-regulating needle 18 and flow dispensing ports 20. The threads employed, 28 per inch (11 per cm), are those commonly employed in commercial threaded cartridges.

5 The configuration of the initial dispenser embodiment as shown in Figs. 1-5 provides an acceptable degree of flow regulation with acceptably low leakage through the valve seat formed by its penetration of the cartridge sealing cap. A hardened steel needle having the size and shape shown in Fig. 4A is sharp and strong enough to penetrate a plug-type cap 30 sealing the neck 15 of cartridge 12. Several designs of caps
10 are composed of mild steel and are employed in commercial cartridges meeting industry safety standards, one of which is shown as the plug-type cap 30 in Figs. 2,3,5 and 7. The cartridge and cap design features meeting these standards, including the required wall thickness and material strength of the cartridge and cap walls, are well known to those skilled in high pressure gas cartridge design, and have been widely accepted as being
15 fully adequate for many years in mass-produced consumer products. Needle 18 having the dimensions set forth below, when employed with caps 30 having the critical dimensions set forth below, will provide both leak tight seals and optimum flow rates for the present invention. As shown in Fig. 3B, when the needle-bearing head 16 is fully screwed onto the carbon dioxide cartridge, the end of the cartridge encounters the surface
20 in which the needle is mounted or another limit. The distance that the needle can penetrate the sealing cap 30 thereby is precisely limited, and the hole it thereby produces has precisely defined dimensions which control and limit the rate of carbon dioxide flow from the cartridge to within a desired flow range (e.g., 1-20 cc/sec) for safe and effective application. The needle 18 creates a pressure-type valve seat as it enters and penetrates
25 the cap. A stop or limit, e.g., provided by engagement of the head 16 against the neck 15, prevents the needle from distorting or enlarging the seat (hole). Controlled flow occurs when the needle is controllably withdrawn from the seat, as shown in Fig. 3C.

 It has been found that mounting the needle 18 in a head 16 material with a relatively high degree of elasticity, such as a plastic polymer, provides a degree of
30 compliance sufficient to accommodate any off-axis "wobble" that occurs during rotation of the head and thereby avoids the associated non- circular and leaky penetration hole that occurs when the needle is mounted rigidly in a metal head. The elastic mount also provides compressive compliance that keeps the needle firmly seated after its repeated insertion into the orifice.

The configuration of the dispenser embodiment shown in Figs. 1-5, having the carbon dioxide-containing cartridge screwed directly into the dispenser head, provides additional advantages. The amount of carbon dioxide contained in a convenient hand-held dispenser is thereby greatly increased over configurations that employ an external cartridge housing. Commercially produced cartridges with threaded necks are available in various sizes containing 8, 12, 16, 38 or more grams of carbon dioxide. The appropriate size employed in the dispenser embodiments described depends on the relative importance of cartridge size and number of treatment doses required for a particular use. For example, studies have shown that hand-held products for treatment of allergic rhinitis must provide hundreds of doses, which would require a relatively large carbon dioxide cartridge. In contrast, hand-held products for treatment of headache need to provide only a few doses, requiring a relatively small cartridge. Balanced against these requirements is the relative importance of size depending on the preferences of various users, e.g., for convenient carrying of the dispenser in a purse or pocket. The 16-gram size cartridge is a presently preferred compromise among these factors. The options readily available for head and cartridge designs having a standard thread in the embodiments described provide a high degree of design flexibility. Similarly, the relatively high simplicity and easy producibility of the dispenser head embodiments described permits fabrication of the dispensing head and cartridge as a single disposable device, especially with a molded plastic polymer head.

The dispenser 10 can be conveniently operated using the steps illustrated in Figs. 3A-3C. In Fig. 3A, the dispenser head 16 is shown in its "shelf" condition where the head is fully elevated relative to the cartridge body 12 so that needle 18 lies above the exposed surface of cap 30. At this point, of course, the cap 30 has not been perforated. It will be appreciated that the head 16 may be completely removed and, indeed, the head 16 and cartridge 12 may be stored and/or distributed separately, where the head 16 may be disposable or reusable. When a patient desires to begin using the dispenser 10, the head 16 will be rotated in the direction shown by arrow 40 in Fig. 3A to cause the head 16 to lower relative to the cartridge body 12 and to cause needle 18 to penetrate into cap 30, as shown in Fig. 3B. By completely closing the cap 16 against the upper surface of the neck 15, as shown in Fig. 3B, the needle 18 will precisely define the penetration 42 having the desired geometry (defined by the geometry of the needle), as shown in Fig. 5. The dispenser 10 is then ready for use. Alternatively, the dispenser can be supplied with the needle having penetrated the cap. In this manner, quality control sampling of the

contained gas can be performed at the manufacturing plant by twisting the dispenser head. A user can open the dispenser head 16 by rotating in the opposite direction, as indicated by arrow 42 in Fig. 3C. The dispenser head is rotated sufficiently to lift the needle 18 up out of the penetration 42 and cap 30. The degree to which the needle is removed from the penetration 42 will determine the flow rate of the gaseous carbon dioxide or other therapeutic gas. That is, the gap left between the outer surface of the needle 18 and the inner surface of the penetration 42 will be variable to create a variable annular flow area through which the gas can pass. The gas flow rate will thus depend on the degree to which the cap 16 has been rotated.

Referring now to Figs. 6-8 the dispenser 10 may be modified to have a calibrated dispensing head 16' with numbers 50 printed or engraved on its lower end to indicate flow rate set points. In a first embodiment, the numbers could be provided without further modification of the head 16 so that a user can dial in any flow rate at or between the designated numbers. In a second embodiment, the dispenser head 16' will be modified to have a spring arm 52 which is received in a plurality of detents 54 formed in the collar 94. The locations of the detents 54 are selected so that the dispenser head 16' will "click" into place for each of the set points indicated by numbers 50 on the dispenser head. To utilize the dispenser head 16', the user will turn the cap in the direction of arrow 56 until the flow rate number 50 is aligned with an indicator arrow 58 printed or embossed on the cartridge body 12. In addition to the visual alignment, the user will sense and hear when the spring arm 52 has entered the detent 54 that corresponds to the desired flow rate. In the most preferred embodiments, a notch 60 is formed in the collar 94. The notch 60 acts as a rotation-limiting stop so that the user cannot accidentally remove the dispenser head 16'. That is, as the spring arm 52 is rotated in the direction of arrow 56 it will eventually enter the notch 60. The abrupt wall 62 at the end of the notch will prevent continued rotation, in turn preventing accidental removal of the head. Of course, the presence of the spring arm 52 may prevent reuse of the rotational cap 16', so that the design of Fig. 6-8 will generally be intended to be disposable.

It should be apparent that methods other than rotation of the dispenser head can be used to controllably vary the flow through a perforation orifice; e.g., the needle can be moved axially by a lever arrangement to controllably accomplish the described perforation and flow regulation within the preferred range of flow rates described herein. Such an arrangement in a hand-held embodiment having a similar

optimum degree of sensitivity and range of adjustment by the fingers as the rotation means described herein can achieve the same result.

3. Embodiment with Separate Puncture and Flow Control Means

- Referring now to Fig. 9A, an alternative dispenser head embodiment 80 will be described. The dispenser head 80 is similar to the embodiment described above with respect to Figs. 1-5, except that the needle perforation and flow regulating aspects of the assembly are separated. In particular, the dispenser head 80 comprises a lower collar 82 and a flow-regulating cap 84 threadably mounted to an upper end of the lower collar. Needle 86 is secured in the lower portion of the flow-regulating cap 84 and includes two tapered regions. The first tapered region 88 acts as the needle tip which penetrates seal 90 which is mounted over the upper end 92 of a high pressure gas bottle 94. The seal 90 extends above a threaded neck 96 of the gas bottle 94. The lower collar 82 is threadably mounted over the threaded neck 96 in such a way that the seal 90 extends into a high pressure gas chamber 98 within the upper end of the lower collar 82. An O-ring seal 100 is provided to inhibit leakage of the high pressure gas.

- Flow regulation in the dispenser head 80 is provided by the second tapered region 102 which is received in a valve seat 104 formed in the upper end of the lower collar 87. Rather than relying on needle penetration to form the flow control aperture, dispenser head 80 relies on a pre-formed conical valve seat 104 which mates with the tapered region 102 on the needle. In this way, the dimensions of both the seat 104 and the tapered region 102 may be carefully controlled in order to assure accurate gas flow control. Thus, when the flow regulating cap 84 is twisted to raise the cap relative to lower collar 82, the tapered region 102 will be lifted out of the valve seat 104. In this way, the flow regulation of the gas can be controlled. Additionally, sealing of the gas flow when the cartridge is to be turned off is provided by both seating of the tapered needle portion 102 in the seat 104 as well as seating of the needle tip in the penetration created in the seal 90. The use of the valve seat 90, which can be formed from a conventional hard metal, ceramic, or other valve material, can greatly enhance the useful life of the dispenser head 80. Thus, such designs may be particularly valuable for non-disposable units where the dispenser head 80 can be reused. Of course, the associated gas cartridge will be replaced whenever the gas being carried has been depleted.

4. Preferred Dispenser Embodiment

From the tests with the initial dispenser embodiment, several improvements were defined leading to a preferred embodiment that also was constructed and tested. It was found that the preferred dispensers of the present invention should enable precise but easy control of the flow rate over the desired flow ranges in a convenient hand-held configuration. In the specific preferred embodiment illustrated in Fig. 9B, it has been found that there is an optimum relationship between the rate of flow of carbon dioxide or other therapeutic gas selected by a user and the degree of rotation of the dispenser head relative to the cartridge that is required to obtain that flow. If the degree of rotation required is too small, it is difficult for the user to select the optimum rate of flow, i.e., the adjustment sensitivity is too coarse. If the degree of rotation is too large, the adjustment to the optimum flow rate requires more than one positioning of the thumb and forefinger that the typical user employs to rotate the head; i.e., the adjustment is awkward and its sensitivity is greater than required. In the latter respect, the mode of adjustment employed by many if not most experienced adult users is to hold the dispenser in the palm of one hand only with the third, fourth and fifth fingers, and to rotate the dispenser head with the thumb and index finger of that hand.

Specifically, it has been found that the rotation of the dispenser head of the preferred embodiment required to obtain the maximum flow rate employed by most users, e.g., 10 cc/sec, should not and need not exceed about 120 degrees in order to obtain an entirely adequate sensitivity of adjustment and to not exceed the rotation comfortably obtainable with a continuous motion of the thumb and index finger. Conversely, a degree of rotation to obtain such typical maximum flow rate, if less than about 30 degrees, is too coarse for sensitive adjustment of the flow over the 1-10 cc/sec range of typical optimum flow rates defined previously. It should be apparent that the optimum relationship between flow rate and degree of head rotation can be obtained by selecting appropriate combinations of perforation orifice size, head diameter and fineness of threads on the cartridge (number of threads/inch).

In using the needle having the initial configuration shown in Fig. 4A it was found that an axial movement of the needle of only about 0.001 inch varies the gas flow from zero to the maximum required flow of 20 cc/sec. This corresponds to a dispenser head rotation of only about 10 degrees using the standard 28 threads per inch on commercial gas cartridges. While this arrangement gave acceptable flow adjustment for the initial tests, the 10 degree rotation is far less than the optimum rotation of 30 to 120

degrees defined above. Accordingly, an alternative dispenser head embodiment permitting use of finer threads, and an alternative needle configuration permitting a much larger axial motion, were incorporated into the preferred dispenser embodiment shown in Fig. 9B. A preferred feature of the subject invention, therefore, is the shape and size of the needle, and the extent and means for precise production and reliable repeated resealing of the perforation orifice by the needle, to obtain the optimum controllable flow rates in the defined effective and tolerable ranges.

The preferred dispenser embodiment shown in Fig. 9B retains the major features of the initial embodiment described previously but, in addition, it can be seen that the single dispenser head part of the initial embodiment has been replaced by a two-part assembly consisting of a head 16' and a collar 94. The head 16' is similar to the initial dispenser head 16 in that it incorporates a perforating and flow-regulating needle 18' along with ports 20' for delivering the dispensed gas. The collar 94 is screwed onto the carbon dioxide cartridge neck 15' and fixed there against rotation, e.g. by a jam thread 14'. The head 16' is screwed onto a fine thread 96 on the collar. The fine thread 96 (e.g., 48-56 threads/inch) permits a much finer rotational adjustment than the coarse thread 14' (typically 28 threads/inch) on the cartridge neck.

The preferred needle configuration, shown in Fig. 4B, permits obtaining the required very small change in orifice area by a relatively large axial displacement of the needle. The lower most portion of the needle, over a distance approximately equal to the thickness of the cartridge sealing cap 30, has essentially the same shape and size as the puncture point 97 shown in Fig. 4A as employed in the initial embodiment of the dispenser. The configuration of this point is an optimum compromise between the strength of a blunt point and the reduced force requirement of a sharp point in the puncture process. However, the needle region 98' beyond the puncture point, that is adjacent to the perforated cap wall, determines the size of the annular flow-controlling orifice of the valve seat 42 when the needle is partially withdrawn. The configuration of the flow-controlling seat region 98' of the needle is advantageous for obtaining the required flow regulation characteristics of the dispenser.

As shown analytically in Fig. 4C, the axial needle displacement giving a required size of the flow-controlling annular orifice is inversely dependent on the taper angle α of the needle in the seat region. This taper angle α is approximately 20 degrees in the initial needle configuration shown in Fig. 4A, which required a needle

displacement x of about 0.001 inch between zero flow and full flow as obtained by a 10 degree rotation of the head with 28 threads/inch. To obtain the 120 degree optimum head rotation, the needle seat taper angle α therefore must be about 1.7 degrees for 28 threads/inch or about 3 degrees for the preferred 48 threads/inch.

- 5 Accordingly, exemplary dimensions for the needles 18 and 18' and cap 30 are set forth in Table II below and provide for desired flow rates in the range from 1 cc/sec to 20 cc/sec for cartridges 12 holding liquid carbon dioxide under pressure. It should be apparent that the preferred needle configuration shown in Fig. 4B, and the calibration and detent provisions shown in Figs. 6-8, can be used with either the one-piece dispenser head shown in Figs. 3A-3C and Fig. 7 or with the two-piece dispenser head shown in Fig. 9B to obtain its attendant advantages. It also should be noted that the two-piece preferred embodiment does not require detent slots in the cartridge threads 14', but only in the collar threads 96.

TABLE II EXEMPLARY NEEDLE AND CAP DIMENSIONS		
	Range	Specific
<i>Needle 18:</i> (Fig. 4A)		
W	0.4-0.6 mm	0.50 mm
α	15-25 deg	20 deg
L ₁	0.4-0.6 mm	0.37 mm
L ₂	0.4-0.6 mm	0.37 mm
<i>Needle 18':</i> (Fig. 4B)		
W ₁	0.4-0.6 mm	0.50 mm
α_1	2-6 deg	3.0 deg
L ₁ '	0.6-1.0 mm	0.75 mm
L ₂ '	0.2-0.6 mm	0.37 mm
<i>Cap 30:</i> (Fig. 5)		
t	0.25-0.4 mm	0.30 mm
\emptyset	3.0-3.8 mm	3.2 mm

15

5. Embodiment with Separate Puncture and Valve Seal Mechanism

- Referring now to Fig. 9A, an alternative dispenser head embodiment 80 will be described. The dispenser head 80 is similar to the embodiment described above with respect to Figs. 1-5, except that the needle perforation and flow regulating aspects of the assembly are separated. In particular, the dispenser head 80 comprises a lower
- 20

collar 82 and a flow-regulating cap 84 threadably mounted to an upper end of the lower collar. Needle 86 is secured in the lower portion of the flow-regulating cap 84 and includes two tapered regions. The first tapered region 88 acts as the needle tip which penetrates seal 90 which is mounted over the upper end 92 of a high pressure gas bottle 94. The seal 90 extends above a threaded neck 96 of the gas bottle 94. The lower collar 82 is threadably mounted over the threaded neck 96 in such a way that the seal 90 extends into a high pressure gas chamber 98 within the upper end of the lower collar 82. An O-ring seal 100 is provided to inhibit leakage of the high pressure gas.

Flow regulation in the dispenser head 80 is provided by the second tapered region 102 which is received in a valve seat 104 formed in the upper end of the lower collar 87. Rather than relying on needle penetration to form the flow control aperture, dispenser head 80 relies on a pre-formed conical valve seat 104 which mates with the tapered region 102 on the needle. In this way, the dimensions of both the seat 104 and the tapered region 102 may be carefully controlled in order to assure accurate gas flow control. Thus, when the flow regulating cap 84 is twisted to raise the cap relative to lower collar 82, the tapered region 102 will be lifted out of the valve seat 104. In this way, the flow regulation of the gas can be controlled. Additionally, sealing of the gas flow when the cartridge is to be turned off is provided by both seating of the tapered needle portion 102 in the seat 104 as well as seating of the needle tip in the penetration created in the seal 90. The use of the valve seat 90, which can be formed from a conventional hard metal, ceramic, or other valve material, can greatly enhance the useful life of the dispenser head 80. Thus, such designs may be particularly valuable for non-disposable units where the dispenser head 80 can be reused. Of course, the associated gas cartridge will be replaced whenever the gas being carried has been depleted.

6. Alternative Gas Provision Means

Referring now to Fig. 9, the methods of the present invention may also be performed with high volume systems in clinical, institutional, and chronic home-care settings. A large volume carbon dioxide or other gas bottle is provided and connected through a conventional pressure regulator 72. The output of the pressure regulator 72 will preferably pass through a gas-flow meter 74 and be connected by a suitable hose or tubing 76 to a hand-held dispenser nozzle 78. The nozzle 78 will have an outlet 79 adapted to interface with a nostril or mouth as described above for the hand-held embodiment. The nozzle 78 will typically also include a flow control valve, which may

be essentially as illustrated in the earlier embodiments for the hand-held dispensers. The only difference required would be that, instead of being connected to a small carbon dioxide or other gas cartridge, the nozzle 78 may be connected to a much larger gas bottle 70 through flexible tube or hose 76, optionally with an in-line flow meter which
5 allows the user to select and adjust a desired flow rate.

As described thus far, the embodiments of the dispensers of the present invention have relied on high pressure systems which contain liquid carbon dioxide or other therapeutic gas. Low pressure systems may be assembled in at least two ways. As shown in Fig. 10, a first exemplary low pressure system 120 may comprise a thin-walled
10 container 122 which contains gaseous carbon dioxide or other therapeutic gas at a relatively low pressure, e.g., 100 psi. The containers 122 may be of the type conventionally employed for low pressure spray cans available for a variety of consumer uses. In contrast, the high pressure carbon dioxide cartridges described above will usually have an internal pressure of about 1,000 psi. The low pressure container 122 may
15 be combined with a dispenser head 124 constructed generally as described above. The sizes of the flow passages, however, might be modified in order to accommodate the lower source pressures. In a second embodiment 140 carbon dioxide and other therapeutic gases may be provided at low pressures using a chemical generation system, as shown in Figs. 11 and 12. For example, a container 142 may include reagents which,
20 upon mixing, release carbon dioxide. In a particular embodiment, dry citric acid powder and sodium bicarbonate are disposed in the container 142 with separated water. The water is then mixed with the dry components, typically by crushing the container 142, as shown in Fig. 12. The water can be released in a variety of ways. For example, the water could be separated by a frangible barrier between the water and the dry components.
25 Preferably, the water will be contained in frangible water-containing microcapsules so that the water is liberated as the container is crushed. The amount of water liberated, however, will depend on the degree to which the container 142 has been crushed, allowing a relatively long useful life for the system. As with prior systems, a dispenser head 144 having flow passages capable of selectively controlling the flow rate to the
30 patient will be provided.

7. Description of Use of the Dispenser Embodiments

Referring now to Fig. 13, any of the dispensers described above may be utilized by delivering the carbon dioxide or other therapeutic gas to the patient, either

through the nose or through the mouth. As shown in Fig. 13, the dispensing head 16 of dispenser 10 is placed by the patient P into one nostril, while the patient refrains from inhaling the therapeutic gas, e.g., holds his/her breath. The carbon dioxide or other therapeutic gas from the dispenser 10 will thus infuse into the nostril, upwardly into the nasal passages and outward through the other nostril, preferably while the patient refrains from inhaling the therapeutic gas. Usually, the patient will keep his/her mouth closed during the nasal infusion, thus limiting the volume of the gas that infuses downward and through the mouth. In some instances, however, it may be desirable for the patient to open his/her mouth (while continuing to refrain from inhaling the therapeutic gas) so that the carbon dioxide or other therapeutic gas infuses not only through the nasal passages but downward through the throat and outward through the mouth. In this way, the mucous membranes of the nasal passages as well as the upper regions of the throat will be treated.

In other embodiments, the user may place the cartridge 10 into his/her mouth, permitting the carbon dioxide or other therapeutic gas to infuse upwardly through the throat and outward through the nostrils. Again, the patient will generally refrain from inhaling the therapeutic gas so that the treatment gas does not enter into the trachea or lungs. By limiting the regions being treated to the nasal passages and in some instances the nasal passages and upper regions of the throat, only very small volumes of the gas are required for treatment, and high (unbreathable) concentrations of the gas can be more effectively employed. This is particularly advantageous when hand-held systems are used where the amount of carbon dioxide or other treatment gas is limited. As noted in the examples provided below, it has been found that even very low volumes of carbon dioxide can be highly effective in treating a number of symptoms associated with the common ailments described above.

As shown in Fig. 14, kits according to the present invention will include a carbon dioxide or other therapeutic gas dispenser 10 in combination with instructions for use 12. The instructions for use will include written instructions corresponding to any of the methods of the present invention as described above. In particular, the written instructions will refer specifically to use of the cartridge 10 in a way to relieve symptoms of common ailments as described above. In addition to the cartridge 10 and written instructions 12, the kits will usually include packaging, for example in the form of a cylindrical container 114 having a removable cap 116. The dispenser 10 and instructions

for use 112 will conveniently be packaged together within the container and covered by the cap 116.

The following examples are offered by way of illustration, not by way of limitation.

5

EXPERIMENTAL

1. Dispenser Models Constructed and Tested

Two models of the initial one-piece head embodiment shown in Fig. 2 were constructed and tested: one with the initial needle configuration shown in Fig. 4A and one with the preferred needle configuration shown in Fig. 4B. Similarly, two models of the preferred two-piece embodiment shown in Fig. 9B (with 48 threads/inch) were constructed and tested: one with the initial needle configuration shown in Fig. 4A and one with the preferred needle configuration shown in Fig. 4B. The dispenser heads were machined from Delrin plastic stock, with embedded needles machined from hardened carbon steel stock. Commercially available steel cartridges with threaded necks (28 threads/inch), containing 16 grams of carbon dioxide, were used in all models. The configurations of the needles were those shown in Figs. 4A and 4B, with a 3 degree taper in the seat region 98' of the preferred needle configuration.

Fig. 15 shows experimental measurements of the flow rate characteristics for the one-piece and two-piece embodiments with the initial needle configuration, as well as those for the combination of preferred two-piece dispenser head with the preferred needle configuration. Data obtained using the initial needle configuration was too erratic to be plotted, i.e., having large hysteresis and other non-reproducible flow characteristics. The dashed lines show the general sensitivity of flow rate to head rotation for those models, however. It can be seen that the preferred needle configuration 18' gives the greatly improved reproducible control and sensitivity required for self-treatment by the patient. The one-piece embodiments of the device of the present invention described above were used in these experiments.

2. Preliminary Human Application Tests

A. *Materials And Methods*

• **Test Device**

The test device was a hand-held, multi-dose, disposable, dispenser that was approximately 3 to 4 inches long and 6/8 to 7/8 inches in diameter constructed as

described above. The device consisted of a plastic twist-top flow regulator mounted on top of a pressurized steel cartridge containing liquid carbon dioxide. The tip of the flow regulator has a nosepiece that is the optimal size and configuration to place against and seal off a nostril for administration of the gas. In a number of subjects, the effective nasal and oral carbon dioxide flow rates, and maximum tolerable nasal and oral flow rates, were measured using a laboratory apparatus. This apparatus consisted of a flow regulator connected via tubing to a flow meter and a large tank of carbon dioxide. These flow data were used, together with the number of seconds gas was administered during therapy, to calculate the estimated dose of gas in milliliters.

• **Subjects**

Of the total of 15 subjects included in the analysis, 11 used the treatment for 35 headaches and 9 subjects used it for 9 allergy attacks. Three subjects treated both headache and allergy but on different days. The subjects included adults, elderly, and children of both sexes in good general health, having mild, moderate, and severe headaches or having allergies to plant, animal, or airborne allergens. The device was used to treat migraine and tension-type headaches, jaw pain, and allergies (allergic rhinitis, with symptoms that included sinus congestion, sneezing, and itchy throat and eyes). There was no limitation on the duration of symptoms before treatment with the device. Subjects with no prior use of the device and those who have used it (to treat allergy symptoms) previously were included.

• **Transmucosal Treatment**

Carbon dioxide (100%) was administered nasally by the subject for a few seconds via a nostril to fill the nasal passages while holding their breath, or taking breaths of room air occasionally if the dose was lengthy. The gas exited the other nostril. Such nasal administration is similar to presently marketed nasal inhalers except that the administered gas was not inhaled. Oral administration, via pursed lips with carbon dioxide exiting via the nostrils, was found to be more effective for allergic inflammation extending into the oral cavity. Subjects took as many doses as they needed for relief. It is important to note that there were no number of doses, duration of dose, time between doses, or gas flow rate specified for the user. Subjects chose their own regimen for symptom relief. Similarly, in medical practice today, gas therapy is a "titrate to effect" therapy without a specified dosage.

• Outcome Measures

The International Headache Society (IHS) divides headache intensity into three categories: mild, moderate, and severe. The rating of the intensity level depends on the extent to which the headache interferes with the ability to function. *Mild* headaches do not interfere with the ability to function, *moderate* headaches interfere with the ability to function but do not require bed rest, and *severe* headaches are incapacitating and require bed rest. The IHS uses headache relief at two hours as its primary outcome measure for present-day headache drug studies. Since therapy of the present invention acts much faster than present-day drugs, the primary outcome measure selected for this analysis was headache relief at 30 minutes. Each of the headache outcome measures used for this analysis is as follows:

- Headache relief efficacy at 1, 5, 15, and 30 minutes post-treatment* - headache relief efficacy is obtained when a pre-treatment headache severity of mild, moderate, or severe severity is improved to a post-treatment severity of none, mild, or moderate respectively.
- Headache free efficacy at 1, 5, 15, and 30 minutes post-treatment* - headache free efficacy is obtained when a pre-treatment headache of mild, moderate, or severe severity is improved to a post-treatment severity of none.
- Headache recurrence within 24 hours post-treatment* - recurrence within 24 hours is defined as no or mild headache severity after treatment that then worsened to moderate or severe headache severity within 24 hours after treatment with no use of rescue medication before the worsening.
- Safety parameter* - safety is defined as no adverse after-effects of treatment.

For allergy, the rating of the intensity level depends on the extent to which the allergy interferes with the ability to function. *Mild* allergies do not interfere with the ability to function, *moderate* allergies interfere with the ability to function but do not completely disrupt the function, and *severe* allergies are incapacitating and completely disrupt the ability to function. The same outcome measures as for headache were used for allergy.

B. Results and Discussion

• Dosage

Initially, the effective nasal and oral, and maximum tolerable nasal and oral carbon dioxide flow rates were measured in seven subjects using a laboratory apparatus. The flow rate selected that is effective or the maximum tolerable rate varies with the individual. At low flow rates, the presence of the carbon dioxide produces a “tingling” sensation similar to that produced during drinking of carbonated beverages that inadvertently enter the nasal passages e.g., “bubbles up the nose”. This is the effective rate and the tingling is a welcome sensation because it usually coincides with immediate relief of symptoms. Above a certain subjectively determined flow rate the sensation becomes unpleasant, which may be described as a “stinging” or “burning” sensation. At a still higher flow rate (maximum tolerable rate), the stinging sensation becomes intolerable and subjects remove the device from their nostril. Also, subjects are more sensitive to the first dose of a series for one attack; subsequent doses give less or no sensation. The flow data show that lower effective and maximum tolerable flow rates were selected by subjects having no prior experience with the treatment (see Table III below). High flow rates were better tolerated orally than nasally. The typical effective rate nasally was 1 to 5 ml/sec and 5 to 10 ml/sec orally.

**TABLE III
EFFECTIVE AND MAXIMUM TOLERABLE
CARBON DIOXIDE FLOW RATES**

Age (yrs)	Gender (m/f)	Experience w/Device (#)	Effective Nasal Rate (ml/sec)	Max Tolerable Nasal Rate (ml/sec)	Effective Oral Rate (ml/sec)	Max Tolerable Oral Rate (ml/sec)
43	f	0	<1 <1	<1	>10*	>10*
47	f	0	<1	2	5-10	>10*
9	m	0	1-2	3	5-10	>10*
44	m	0	2	4	2	>10*
45	m	>10	4-5	10	5-10	>10*
72	m	>1000	4-5	10	5-10	>10*
72	f	>1000	4-5	10	5-10	>10*

20 *Maximum calibrated flow rate of flow meter was 10 ml/sec

For therapy, it is important to note that no number of doses, duration of dose, time between doses, or gas flow rates were specified for the user. Subjects chose

their own regimen for symptom relief. Analysis of the therapy data (see Table IV below) shows that the treatment is dose dependent. In general, milder attacks required fewer doses of shorter duration, thus a lower volume of gas, than severe attacks. Also, tension-type headaches required shorter average duration doses than migraine headaches (tension=24 sec, range=6-56 sec; migraine=57 sec, range=30-83 sec), and generally a lower volume of gas (tension=122 ml, range=28-288 ml; migraine=158 ml, range=82-233 ml). The average duration and total dose volume for headache and allergy treatment were similar (headache=32 sec and 124 ml; allergy=39 sec and 133 ml) as were the total treatment times (headache=7 min; allergy=5 min).

**TABLE IV
EFFECTIVE CARBON DIOXIDE DOSE**

Attack Type, Severity (N=No. of Subjects)	No. of Attacks (n)	Single Dose Duration (sec)	Number of Doses (#)	Total Dose (sec)	Est. Rate (ml/sec)	Est. Total Dose (ml)	Total Treatment Time (min)
Headache (N=11)							
Migraine-Mild	6	23	1	30	3	82	1
Migraine-Severe	4	35	2	83	3	233	28
Migraine-All	10	29	2	57	3	158	15
Tension-Mild	3	3	2	6	3	28	2
Tension-Moderate	15	6	2	11	4	50	4
Tension-Severe	7	15	4	56	5	288	11
Tension-All	25	8	3	24	4	122	6
Headache-All	35	15	2	32	4	124	7
Allergy (N=9)							
Allergy-Mild	1	15	2	40	5	200	>0.7
Allergy-Moderate	2	3	2	16	2	31	>0.2
Allergy-Severe	6	17	2	46	4	156	>3.9
Allergy-All	9	13	2	39	3	133	5

• **Headache**

A total of 11 headache subjects with 35 headaches were assessed. The subjects were males (49%) and females (51%) ranging in age from 9 to 73 years (mean=55) with mild (26%), moderate (43%), and severe (31%) headaches which included migraine (29%), tension-type (66%), and jaw headaches (5%). Headache duration before treatment averaged 2 hours (migraine=2.4 hours, tension=1.5 hours) and ranged from 0.3 to greater than 18 hours for migraines and 0.1 to 4 hours for tension-type

headaches. The subjects with migraines had used the device from 0 to 8 times and those with tension-type headache from 0 to 13 times with one individual who had not used it previously for headache but has used it for allergies over 1000 times.

- Using the efficacy outcome measures defined above, (which include mild headaches, with relief defined as mild, moderate, or severe reduced to none, mild, or moderate respectively) the present treatment had a 94% *headache relief efficacy* (migraine=90%, tension=96%) and an 80% *headache free efficacy* (migraine=90%, tension=80%) for headaches at 30 minutes post-treatment (see Table V below). Considerable headache relief was also obtained at 15 minutes post-treatment (headache relief efficacy=86%; headache free efficacy=74%). Subjects reported immediate onset of symptom relief within seconds while administering the first dose. There were no instances of headache recurrence 24 hours post-treatment with the gas therapy and no subjects reported any adverse after effects of treatment.

TABLE V
EFFICACY AND SAFETY – HEADACHE (MILD, MODERATE, SEVERE)

Attack Type (N= No. of subjects)	No. of Attacks (n)	Symptom Relief, Minutes Post-Treatment (%)				Symptom Free, Minutes Post-Treatment (%)				24-hr. Recur Rate (%)	After Effects (%)
		1	5	15	30	1	5	15	30		
Migraine (N=2)	10	60	60	60	90	60	60	60	90	0	0
Tension (N=9)	25	20	64	96	96	20	64	80	80	0	0
Headache-All	35	31	63	86	94	31	60	74	80	0	0

- Using the more stringent IHS efficacy outcome measures (that exclude mild headaches, with relief defined as moderate or severe reduced to mild or none) the treatment had the same average symptom *headache free efficacy* of 80% (migraine=75%, tension=80%) for headache at 30 minutes as in the above analysis (see Table VI below). With these criteria, the treatment had an 84% *headache relief efficacy* (migraine=100%, tension=77%) for headache at 30 minutes. Considerable headache relief also was obtained at 15 minutes post-treatment (*headache relief efficacy*=72%; *headache free efficacy*=72%).

TABLE VI EFFICACY AND SAFETY – HEADACHE (MODERATE, SEVERE – IHS CRITERIA)											
Attack Type (N= No. of subjects)	No. of Attacks (n)	Symptom, Relief, Minutes Post-Treatment (%)				Symptom Free, Minutes Post-Treatment (%)				24-hr. Recur Rate (%)	After Effects (%)
		1	5	15	30	1	5	15	30		
Migraine (N=2)	4	25	25	25	100	25	25	25	75	0	0
Tension (N=8)	22	14	55	77	77	14	55	77	77	0	0
Headache-All	25	16	52	72	84	16	52	72	80	0	0

In summary, treatment of migraine and tension-type headache according to the present invention shows 80-94% efficacy occurring in seconds to minutes (average treatment time=7 min) compared to 50-70% efficacy in 2-4 hours with current drugs even though this was a dose-finding analysis where the optimal dosing regimen was not defined. This feasibility summary had many subjects who had never used the device, or never used it for headaches, resulting in a number of instances where therapy was more efficacious after they learned the most effective personal dosing regimen. For example, a subject suffering severe tension headaches tried on three occasions to eliminate the headaches with only moderate success using numerous doses of short duration (six doses of 8 sec each=240 ml). Subsequently, she was able to completely eliminate a severe tension headache and a severe jaw/tooth ache with fewer doses of longer duration (three doses of 15 sec each=225 ml and three doses of 45 sec each=675 ml, respectively). As another example, a subject suffering a moderate tension headache, who had never used the device for headaches, tried to eliminate the headache with no success using an extremely small dose (one dose of 1 sec=2 ml). Finally, one patient suffering from a migraine headache was unable to improve on a mild migraine the first time he used the device (one dose for 30 sec=60 ml). However, he was able to completely eliminate all subsequent mild and severe migraines with a dosage regimen he developed that increased the gas volume dose (two to three doses for 25 sec each=120 ml). He had a history of severe migraines bimonthly for over 25 years and had selected sumatriptan (Imitrex®) by injection as a treatment prior to receiving the device. Since he has tested the device of the present invention, he has used no other headache medication and no longer has moderate or severe migraines. When he first feels the onset of a migraine, he doses twice for 20 to 25 seconds according to the present invention. This completely aborts the migraine and it does not recur. The frequency of migraine incidents has also decreased.

• **Allergy**

There were 9 allergy subjects with 9 allergy attacks assessed. The subjects were males (67%) and (33%) females ranging in age from 9 to 72 years (mean=39) with mild (11%), moderate (22%), and severe (67%) allergies which included symptoms in the nose, throat, and eyes). Allergy duration before treatment ranged from 0.2 to 1.5 hours. The subjects had used the device from 0 to over 1000 times.

The treatment achieved 100% *allergy relief efficacy* and an 89% *allergy free efficacy* at both 15 and at 30 minutes (see Table VII below). Using the more stringent efficacy outcome measures (which exclude mild allergies and relief is defined as moderate or severe reduced to mild or none) the treatment had essentially the same *allergy relief efficacy* and *allergy free efficacy* as in the above analysis. Subjects reported immediate onset of symptom relief within seconds while administering the first dose. There was a 50% recurrence of allergy symptoms; however, N was small (N=4) for this determination. The recurrences did not occur until 3 hours or longer post-treatment.

TABLE VII
EFFICACY AND SAFETY – ALLERGY (MILD, MODERATE, SEVERE AND MODERATE, SEVERE)

Symptom Type	No. of Attacks (n)	Symptom, Relief, Minutes Post-Treatment (%)				Symptom Free, Minutes Post-Treatment (%)				24-hr. Recur Rate (%)	After Effects (%)
		1	5	15	30	1	5	15	30		
Allergy (N=9)	9	33	78	100	100	33	67	89	89	50	0
Allergy (N=8)*	8	25	75	100	100	25	63	88	88	50	0

*More stringent outcome measure definitions

In summary, treatment of allergic rhinitis according to the present invention shows 88-100% efficacy occurring in seconds to minutes (average treatment time=5 min) compared to minutes to hours with current drugs. No subjects reported any adverse after effects of treatment.

While the above is a complete description of the preferred embodiments of the invention, various alternatives, modifications, and equivalents may be used. Therefore, the above description should not be taken as limiting the scope of the invention that is defined by the appended claims.

WHAT IS CLAIMED IS:

1 1. A method for delivering a therapeutic gas to a patient having a
2 mouth and a nose, said method comprising:
3 generating a flow of a therapeutic gas; and
4 infusing a nasal and/or an oral mucous membrane with the flow of
5 therapeutic gas;
6 wherein the patient refrains from inhaling the therapeutic gas.

1 2. A method for delivering a therapeutic gas to a patient, said method
2 comprising:
3 generating a flow of a therapeutic gas; and
4 infusing an ocular mucous membrane with the flow of therapeutic gas.

1 3. A method as in claim 1 or 2, wherein the therapeutic gas is selected
2 from the group consisting of carbon dioxide, nitric oxide, oxygen, helium, dilute mixtures
3 of nitric oxide, and isocapnic mixtures of acid gases.

1 4. A method as in claim 3, wherein the therapeutic gas consists
2 essentially of carbon dioxide.

1 5. A method as in claim 3, wherein the carbon dioxide is present in a
2 carrier gas.

1 6. A method as in claim 3, wherein generating comprises generating a
2 flow at a rate in the range from 0.5 cc/sec to 20 cc/sec carbon dioxide.

1 7. A method as in claim 6, wherein the gas flow is continued for from
2 1 to 100 seconds.

1 8. A method as in claim 7, further comprising at least a second
2 infusing step which is continued for from 1 to 100 seconds.

1 9. A method as in claim 8, further comprising at least a third infusing
2 step which is continued for from 1 to 100 seconds.

1 10. A method as in claim 1, wherein infusing comprises directing the
2 flow of therapeutic gas to one nostril and allowing the flow to exit through the other
3 nostril and/or the mouth.

1 11. A method as in claim 10, wherein the patient's mouth is closed and
2 the flow exists entirely from the other nostril.

1 12. A method as in claim 1, wherein infusing comprises directing the
2 flow of therapeutic gas to the mouth and allowing the flow to exit through at least one
3 nostril.

1 13. A method as in claim 2, wherein infusing comprises directing the
2 flow of therapeutic gas to at least one eye.

1 14. A method as in claim 1 or 2, further comprising adjusting the flow
2 rate of the gas to a level which the patient perceives is comfortable.

1 15. A method as in claim 14, further comprising adjusting the duration
2 of treatment in response to changes in the gas flow rate, where decreases in flow rate
3 result in an increase in treatment time.

1 16. A method for generating a therapeutic dosage of a gas, said method
2 comprising:
3 releasing from a hand-held dispenser a flow of therapeutic gas comprising
4 from 0.5 cc/sec to 20 cc/sec, when the gas is selected from the group consisting of carbon
5 dioxide, nitric oxide, oxygen, helium, dilute mixtures of nitric oxide, and isocapnic
6 mixtures of acid gases.

1 17. A method as in claim 16, wherein the gas flow consists essentially
2 of carbon dioxide.

1 18. A method as in claim 16, wherein the gas flow comprises carbon
2 dioxide in a carrier gas.

1 19. A method as in claim 16, wherein the treatment gas comprises a
2 compound and a carrier gas, wherein the compound and carrier gas interact.

1 20. A method as in claim 19, wherein the carrier gas is selected from
2 the group consisting of air, oxygen, nitrogen, and halogenated hydrocarbons.

1 21. A method as in claim 16, wherein the hand-held dispenser has an
2 outlet that is suitable for sealing against a human nostril.

1 22. A method as in claim 16, wherein the hand-held dispenser has an
2 outlet that is suitable for sealing against a human mouth.

1 23. A method as in claim 16, wherein the hand-held dispenser has an
2 outlet that is suitable for sealing over a human eye.

1 24. A method as in claim 16, wherein the gas flow is continued for
2 from 1 to 100 seconds.

1 25. A method as in claim 24, further comprising at least a second
2 releasing step which is continued for from 1 to 100 seconds.

1 26. A method as in claim 25, further comprising at least a third
2 releasing step which is continued for from 1 to 100 seconds.

1 27. A method as in claim 16, wherein releasing comprises adjusting the
2 flow rate to a set point within the 0.5 cc/sec to 20 cc/sec range.

1 28. A dispenser for delivering a therapeutic gas, said method
2 comprising:
3 a container holding a volume of the therapeutic gas under pressure;
4 a flow regulator that releases a flow of the therapeutic gas from the
5 container;
6 and an outlet that seals against a human nostril.

1 29. A dispenser as in claim 28, wherein the therapeutic gas is selected
2 from the group consisting of carbon dioxide, nitric oxide, oxygen, helium, dilute mixtures
3 of nitric oxide, and isocapnic mixtures of acid gases with a carrier gas.

1 30. A dispenser as in claim 29, wherein the therapeutic gas consists
2 essentially of carbon dioxide.

1 31. A dispenser as in claim 29, wherein the treatment gas comprises a
2 compound and a carrier gas, wherein the compound and the carrier gas interact.

1 32. A dispenser as in claim 28, wherein the therapeutic gas comprises
2 carbon dioxide in a carrier gas.

1 33. A dispenser as in claim 29, wherein the flow regulator is adjustable
2 so that the user can select a flow rate in the range from 0.5 cc/sec to 20 cc/sec.

1 34. A dispenser as in claim 33, wherein the container comprises a
2 cylinder, the adjustable flow regulator comprises a head at one end of the cylinder, and
3 the outlet comprises a nozzle in the head.

1 35. A dispenser as in claim 34, wherein the head is axially translatable
2 and carries a needle that perforates a sealing cap in the cylinder to form a flow-regulating
3 orifice in the cap.

1 36. A dispenser as in claim 34, wherein the head is axially translatable
2 and carries a needle that perforates a sealing cap in the cylinder, wherein flow is
3 controlled by a previously formed orifice in the head.

1 37. A dispenser as in claim 34, wherein the head is rotatable to effect
2 axial translation.

1 38. A dispenser as in claim 37, wherein the head comprises detents
2 which permit selection of predefined flow rates.

1 39. A dispenser for delivering carbon dioxide, said method comprising:
2 a container holding a volume of carbon dioxide under pressure; and
3 a flow regulator that releases a flow of the carbon dioxide from the
4 container at a rate in the range from 0.5 cc/sec to 20 cc/sec.

1 40. A dispenser as in claim 39, further comprising of an outlet that
2 seals against a human nostril.

1 41. A dispenser as in claim 39, further comprising an outlet that seals
2 against a human mouth.

- 1 42. A dispenser as in claim 39, further comprising an outlet that seals
2 against a human eye.
- 1 43. A dispenser as in claim 39, wherein the carbon dioxide is
2 substantially pure.
- 1 44. A dispenser as in claim 39, wherein the carbon dioxide is present in
2 a carrier gas.
- 1 45. A dispenser as in claim 39, wherein the carbon dioxide is present in
2 the container as a liquid.
- 1 46. A dispenser as in claim 39, wherein the carbon dioxide is present in
2 the container as a pressurized gas.
- 1 47. A dispenser as in claim 39, wherein the flow regulator is adjustable
2 so that the user can select a flow rate in the range from 0.5 cc/sec to 20 cc/sec.
- 1 48. A dispenser as in claim 39, wherein the container comprises a
2 cylinder, the adjustable flow regulator comprises a head at one end of the cylinder, and
3 the outlet comprises a nozzle in the head.
- 1 49. A dispenser as in claim 48, wherein the head is axially translatable
2 and carries a needle that perforates a sealing cap in the cylinder to form a flow-regulating
3 orifice in the cap.
- 1 50. A dispenser as in claim 48, wherein the head is axially translatable
2 and carries a needle that perforates a sealing cap in the cylinder, wherein flow is
3 controlled by a previously formed orifice in the head.
- 1 51. A dispenser as in claim 48, wherein the head is rotatable to effect
2 axial translation.
- 1 52. A dispenser as in claim 51, wherein the head comprises detents
2 which permit selection of predefined flow rates.
- 1 53. A kit comprising:
2 a container holding a therapeutic gas; and

3 instructions for use setting forth a method for delivering the therapeutic
4 gas to a patient from the container comprising:
5 generating a flow of the therapeutic gas; and
6 infusing a nasal and/or an oral mucous membrane with the flow of
7 therapeutic gas, wherein the patient refrains from inhaling the therapeutic gas.

1 54. A kit comprising:
2 a hand-held container holding carbon dioxide; and
3 instructions for use setting forth a method for delivering the carbon
4 dioxide from the container to a patient comprising:
5 releasing from the hand-held container a flow of carbon dioxide
6 comprising from 0.5 cc/sec to 20 cc/sec of carbon dioxide.

1 55. A container as in claim 54 wherein the instructions further set forth
2 to direct the carbon dioxide to a nostril or mouth of the patient while the patient refrains
3 from inhaling the carbon dioxide.

1 56. A treatment gas supply system comprising:
2 a hand-held nozzle having an outlet that seals against a nostril or mouth or
3 eye of a patient;
4 an adjustable flow control regulator that is adjustable to a flow rate in the
5 range from 0.5 ml/sec to 20 ml/sec when connected to a source of pressurized treatment
6 gas; and
7 a hose connectable at one end to the nozzle and at another end to a source
8 of the therapeutic gas.

1 57. A treatment gas supply system as in claim 56, further comprising a
2 flow meter in the line with the nozzle to permit a user to adjust flow rate to a desired
3 value while observing the flow meter.

1 58. A kit comprising:
2 a container holding a therapeutic gas; and
3 instructions for use setting forth a method for delivering the therapeutic
4 gas to a patient from the container comprising:
5 generating a flow of the therapeutic gas; and
6 infusing an ocular mucous membrane with the flow of therapeutic gas.

1 59. A gas dispensing needle comprising:
2 a needle body having a penetrating tip, a proximal conical shaft, and a
3 flow passage between the shaft and an orifice in the penetrating tip;
4 wherein the tip region has an angle of convergence greater than 25°; and
5 wherein the conical shaft has an angle of convergence of the range from 2°
6 to 6°.

1 60. A gas dispensing needle as in claim 59, wherein the penetrating tip
2 region extends over a length in the range from 0.6 mm to 1 mm and the conical shaft
3 region extends over a length in the range of 0.2 mm to 0.6 mm.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2

METHODS AND APPARATUS FOR RELIEVING HEADACHES, RHINITIS AND OTHER COMMON AILMENTS

ABSTRACT OF THE DISCLOSURE

Apparatus, methods, and kits for treating symptoms associated with common ailments, such as headaches, rhinitis, asthma, epilepsy, nervous disorders and the like, are provided. The apparatus comprises dispensers for carbon dioxide and other therapeutic gases. The methods comprise delivering small volumes of these gases to patients in a manner where the gas infuses into a body region in order to bathe the mucous membranes therein. It has been found that even very short exposure of patients to small volumes and high concentrations of such gases can provide significant relief from symptoms.

PA 3081828 v1

00514309.07.200

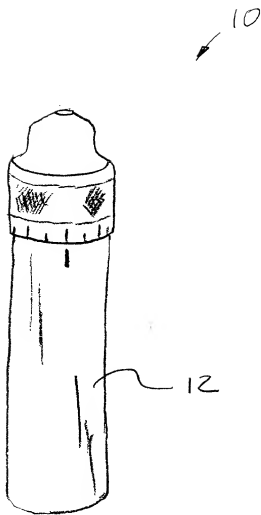


FIG- 1

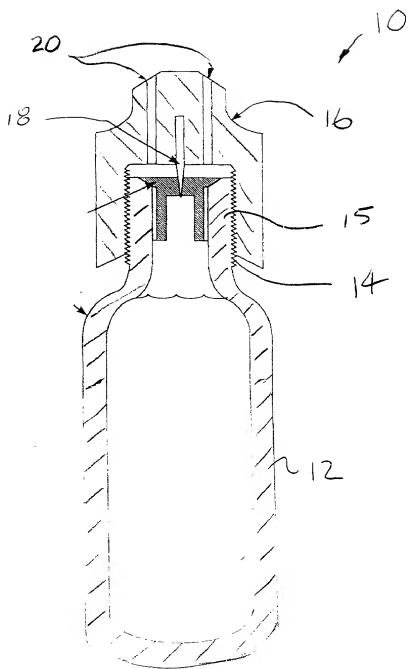


FIG-2


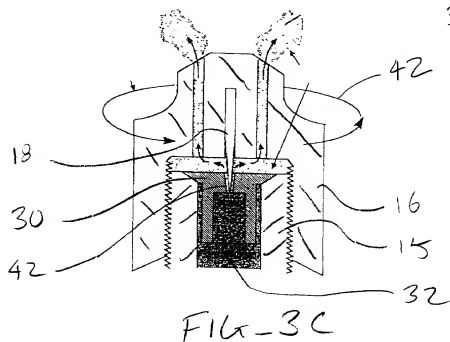
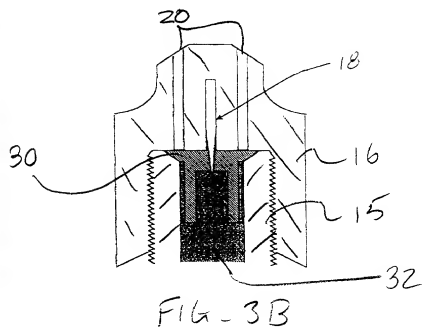



Fig. 4A

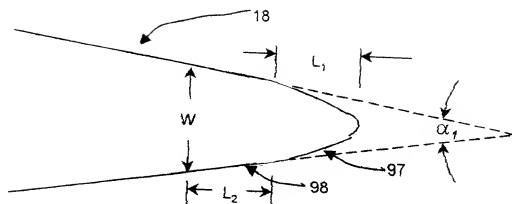


Fig. 4B


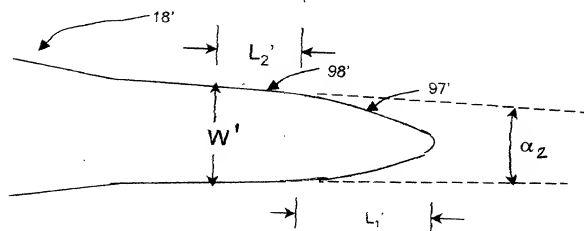






Fig. 4C

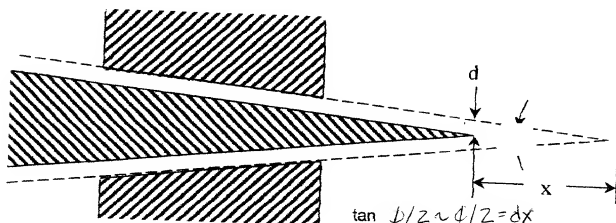

$$\tan \phi/2 \sim \phi/2 = dx$$

$$d \sim \phi x/2$$

$$\phi \sim 2 d/x = 115 d/x \text{ deg}$$

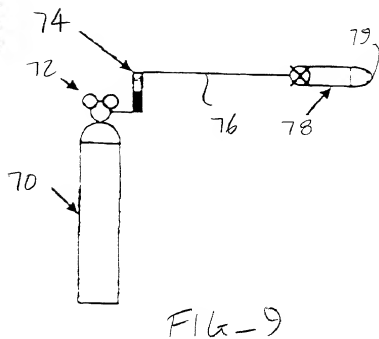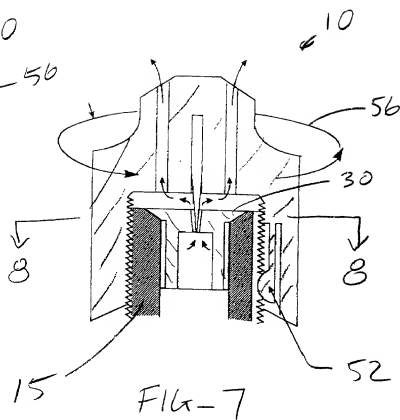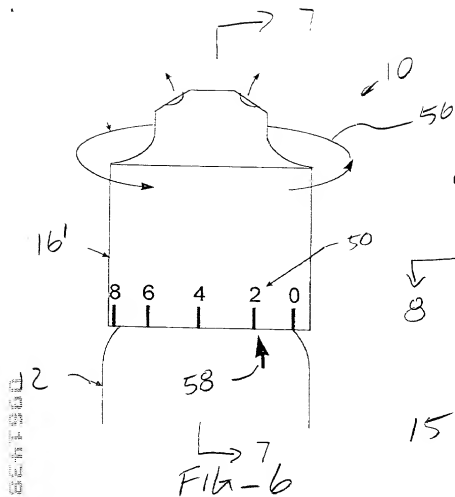

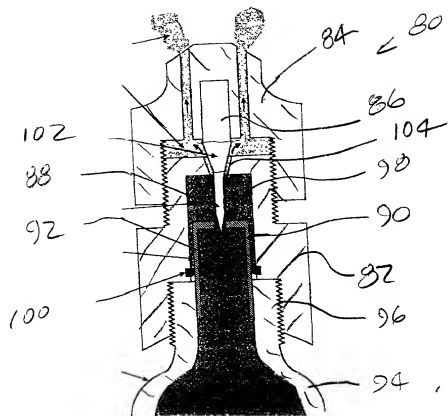


FIG- 9A

120 →

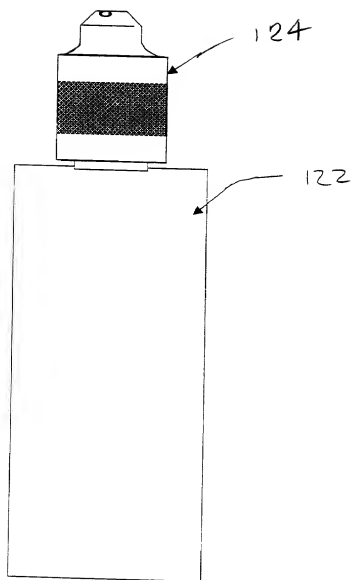


FIG-10

140 →

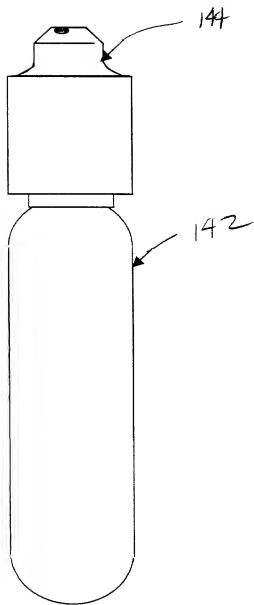


Fig-11

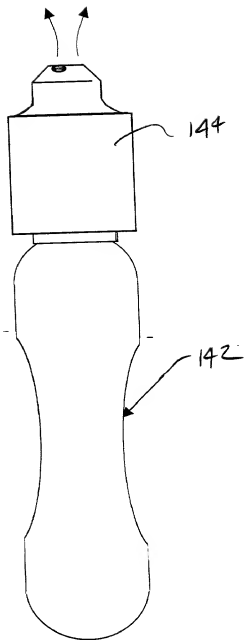


Fig-12

P→

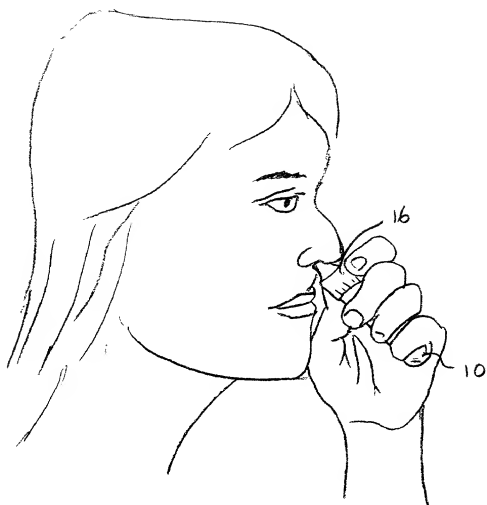


FIG-13

0964289.071200

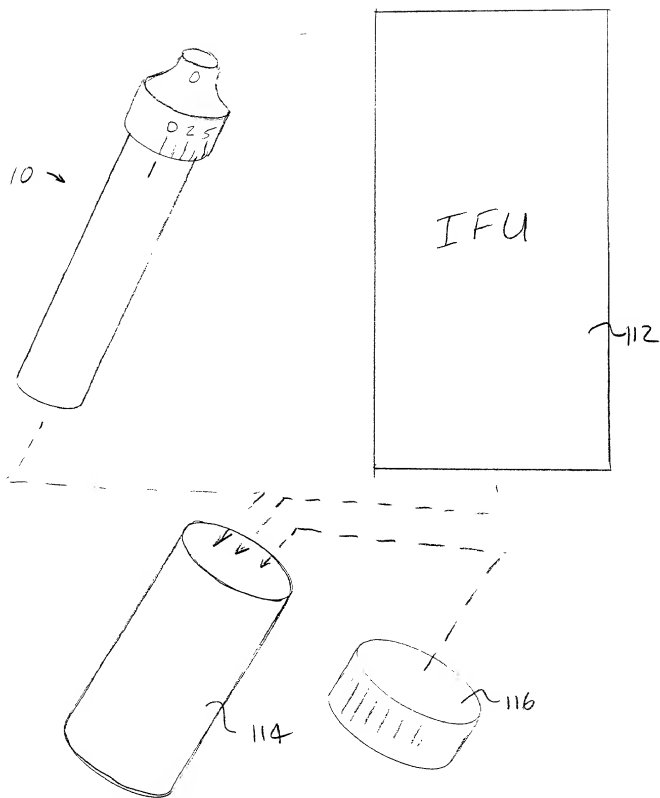


FIG. 14

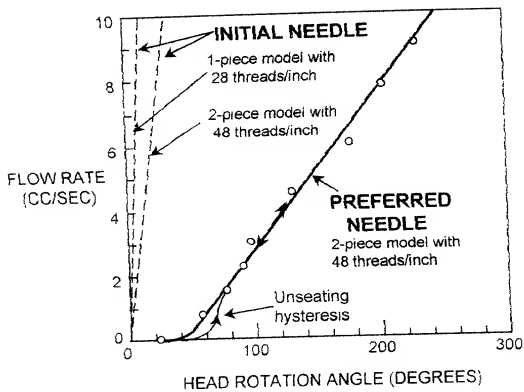


FIG - 15

DECLARATION

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **METHODS AND APPARATUS FOR RELIEVING HEADACHES, RHINITIS AND OTHER COMMON AILMENTS** the specification of which XX is attached hereto or _____ was filed on _____ as Application No. _____ and was amended on _____ (if applicable).

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56. I claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below:


Application No.	Filing Date
60/143,164	JULY 12, 1999

Full Name of Inventor 1:	Last Name: RASOR	First Name: NED	Middle Name or Initial: S.
Residence & Citizenship:	City: Cupertino	State/Foreign Country: California	Country of Citizenship: United States
Post Office Address:	Post Office Address: 15601 Montebello Road	City: Cupertino	State/Country: California Postal Code: 95014
Full Name of Inventor 2:	Last Name: RASOR	First Name: JULIA	Middle Name or Initial: S.
Residence & Citizenship:	City: Los Gatos	State/Foreign Country: California	Country of Citizenship: United States
Post Office Address:	Post Office Address: 104 Smith Creek Drive	City: Los Gatos	State/Country: California Postal Code: 95030

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature of Inventor 1	Signature of Inventor 2
<u>NED S. RASOR</u>	<u>JULIA S. RASOR</u>
Date	Date

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division



Application deficiencies were found during scanning:

☐ Page(s) _____ of _____ were not present:
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present:
for scanning. (Document title)

There are only 41 pages of specification enclosed

☐ Scanned copy is best available.